



Grand Coliseum

A PAVER PRODUCT OF HARDSCAPES USA



Shown Below: 3-piece Grand Coliseum pavers in Silver Shells Blend.



Our new 3-piece Grand Coliseum paver provides the timeless look of a European avenue on a much larger scale. The oversized 12.5x9 unit, combined with a 9x9 square and a 6x9 rectangle, make

Grand Coliseum perfect for driveways, patios, pool decks and any paved surface that calls for striking style with vintage appeal. This product is also available in six new color blends.




Grand Coliseum



Visit www.hardscapesusa.com for project ideas and product information.

Paver Size.....	60mm
Sq. ft. per cube.....	104 ft ²
Pieces per cube.....	6x9 (72), 9x9 (72), 12.5x9 (36) pcs
Weight per cube (approx).....	3050 lbs

Dimensions:

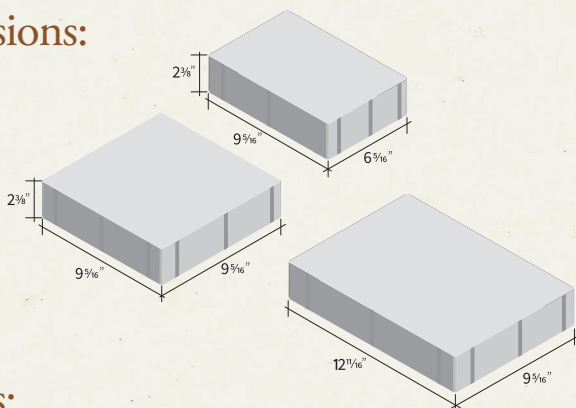

Patterns:

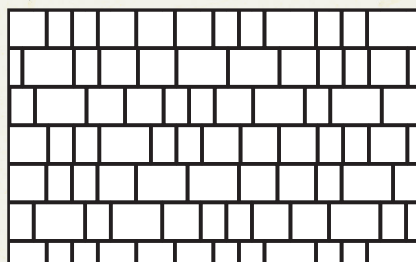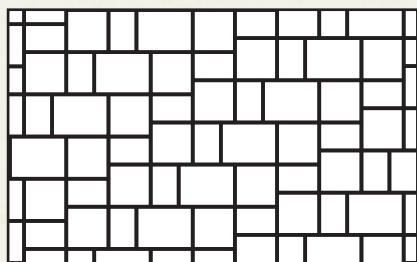

Color Selections:

Standard colors are available using both gray and white cements, while an extensive collection of two and three color blends is available. To see the complete line of colors and blends produced in your market area, please visit our website at www.hardscapesusa.com.

Typical Installation:

1. Excavate subgrade material and compact the area which has been cleared. Then backfill with dense-graded aggregate (typically 4 to 6 inches for light vehicular and pedestrian traffic, increasing to 8 to 12 inches for heavy vehicular and industrial use) as directed by site engineer, architect, or landscape architect.
2. Place bedding course of sharp, normal-weight screening sand to a uniform depth of approximately 1-1/2 inches leveled to grade.
3. Install USA pavers on bedding course in pattern desired.
4. Where required, cut paving stones with an approved cutter to fit accurately, neatly and without damaged edges.
5. Tamp paving stones with mechanical vibrator uniformly level, true to grade and free of movement.
6. Fill voids in joints by sweeping in a fine, dry masonry sand.

The information contained herein is accurate to the best of our knowledge, but USA assumes no liability whatsoever for its accuracy or completeness. Final determination of suitability of any material is the sole responsibility of the user.



Product Composition:

USA pavers are made with zero-slump concrete, which is then hydraulically pressed while being subjected to extremely high frequency vibrations. This process results in USA pavers having a compressive strength of 8,000 psi or greater (ASTM C-936) and a moisture absorption of less than 5%.

About USA

USA is a manufacturer and distributor of a wide range of quality concrete products including pavers, retaining wall units, and patio products. They are produced and distributed throughout the Southeast and are used in residential, commercial, and industrial construction.

USA pavers are synonymous with distinctive paving applications and have earned a reputation for both quality and durability.

USA pavers are well-suited for both the discriminating design application and the heavy-duty, functional project.